

1 On prediction of wind-borne plumes with simple
2 models of turbulent transport

3 Katherine T. Schwarz Tad W. Patzek Dmitriy B. Silin

4 June 21, 2006

5 **Abstract**

6 The dispersion of pollutants from the ground by turbulent winds is diffi-
7 cult to model in general. However, for flat homogeneous terrain and steady
8 wind conditions, if the wind profile is modeled with a power-law dependence
9 on height, the advection-dispersion equation has an exact solution. In this
10 paper the analytical solution is compared to a numerical simulation of the
11 coupled air-ground system for a leaking underground gas storage, with a
12 power-law velocity profile that was fit to the logarithmic velocity profile
13 used in the simulation. The two methods produced similar results far from
14 the boundaries, but the boundary conditions had a strong effect; the sim-
15 ulation imposed boundary conditions at the edge of a finite domain while
16 the analytic solution imposes them at infinity. The reverse seepage from
17 air to ground was shown in the simulation to be very small, and the sharp
18 contrast between time scales suggests that air and ground can be modeled
19 separately, with gas emissions from the ground model used as inputs to the
20 air model.

21 **1 Introduction**

22 Predicting the dispersion of air pollutants from sources on the ground requires
23 modeling of turbulent transport. A full description of turbulence is beyond
24 either theory or simulation, but approximate results can be derived from an
25 analytical model that is relatively simple, while still accounting for the variation
26 with height of wind speed and diffusivity.

27 Even in the simplified model discussed in this report, few analytical
28 solutions are known. Many well-established models used for regulatory purposes
29 use Gaussian plumes, which are computationally simple, but assume that wind
30 speed and diffusivity are uniform (New Zealand Ministry for the Environment,
31 2004). As a result, the plume height and decrease of ground-level concentration

are underestimated. If the wind speed and diffusivity are instead assumed to follow a power-law dependence on height, there is a more general analytical solution which is just as easy to compute and potentially more accurate. The power law can be used to approximate the wind profile in stable, unstable or neutral atmospheric conditions.

This report compares two approaches to modeling leakage of a gas from an underground reservoir into the surface layer of the atmosphere:

1. Using a known source distribution at the surface as a boundary condition on the differential equation describing admixture transport (Barenblatt, 2003b); and
2. Simulating both air and ground transport together in a finite-volume code, with a logarithmic wind velocity profile (Oldenburg & Unger, 2004).

The analytical solution applies to a simplified model that assumes homogeneous flat ground and no change of wind conditions with time, as well as the power-law dependence of wind speed and diffusivity. More realistic descriptions would require numerical simulation of turbulence; the approaches discussed here do not actually model turbulence, but rather specify the amount of mixing that results from it. The purpose of comparing the analytical solution with the coupled simulation is in particular to investigate

- How sensitive is the solution to the velocity profile, and to the exponent in the power law?
- How is the simulation affected by a closed-top boundary condition imposed in the numerical model?

This report first describes the simplest possible model of turbulent diffusion, then compares the two approaches.

2 A simple theoretical picture of turbulent diffusion

Trace gases are passive additives to the air, i.e., they do not affect the already existing flow field, if they are sufficiently dilute. Smoke or dust may also be passive additives if the particles are small enough (less than about 1 micron diameter) that settling due to gravity can be neglected. The concentration of a passive additive is governed by the advection-dispersion equation,

$$\partial_t c + \nabla \cdot (\mathbf{u}c) = -\nabla \cdot \mathbf{F} \quad (2.1)$$

63 where c is the concentration, \mathbf{u} is wind velocity, and \mathbf{F} is the diffusive flux of the
 64 additive due to turbulent mixing; c , \mathbf{u} , and \mathbf{F} are functions of the space coordi-
 65 nates \mathbf{r} and time t . Emission of the additive from a source can be represented
 66 by a boundary condition or source term.

67 In reality all these functions experience rapid turbulent fluctuations on
 68 time scales typically from about 0.1 second to 10^3 seconds. It is impossible and
 69 unnecessary to predict the fluctuations accurately; we are only concerned with
 70 average concentration, wind velocity and flux. Theoretically this average should
 71 be an ensemble average, based on repeating the experiment. When wind veloc-
 72 ity or concentration is measured experimentally, replicating the same weather
 73 conditions is not feasible, and ergodicity is assumed so that time averages can be
 74 used instead (Monin & Yaglom, 1971, sec. 3), typically over intervals of 30 min-
 75 utes or 1 hour.

76 The following sections will discuss the forms of wind velocity and diffusive
 77 flux that will be used in equation (2.1).

78 2.1 Velocity profile in the surface layer

79 The earth's surface exchanges momentum, heat, and mass with the atmosphere
 80 through the planetary boundary layer, which has a thickness of the order of
 81 1 km and responds to changes in the surface over time scales of a few hours. The
 82 planetary boundary layer is almost always turbulent. In roughly the bottom 10%
 83 of the planetary boundary layer, the Coriolis force can be neglected compared to
 84 surface effects; this region is called the surface layer. There are strong vertical
 85 gradients of wind velocity in the surface layer, as the winds aloft must be reduced
 86 to zero at the surface by friction, and there are also strong vertical gradients
 87 of temperature and scalar concentrations due to the fluxes of heat and mass
 88 emitted or absorbed by the surface.

89 We would like to describe the wind velocity profile and the turbulent
 90 mixing in the surface layer with a minimum of measurable parameters. Our
 91 simple theoretical model assumes:

- 92 • The ground is flat and homogeneous over an area large enough that edge
 93 effects can be ignored, and therefore the flow field does not depend on the
 94 horizontal coordinates, but only on height.
- 95 • The air is incompressible ($\nabla \cdot \mathbf{u} = 0$), a good approximation in the surface
 96 layer. Together with the first assumption, this implies that the average
 97 vertical component of wind is zero.
- 98 • In the conventional coordinate system, z is height above ground and the x

axis is chosen along the direction of the average wind. The velocity along this axis is the wind profile $u(z)$.

Turbulence generated by surface friction

To describe turbulent flow near a rough surface when there is no heat flux, von Kármán's "law of the wall" is widely used (Arya, 1999, section 4.7.1):

$$\frac{u(z)}{u_*} = \frac{1}{k} \ln \frac{z}{z_0} \quad (2.2)$$

where

- u_* is called the friction velocity, and is defined from the shear stress at the surface, τ , and the air density, ρ , by $u_* = \sqrt{\tau/\rho}$. This shear results from the covariance of turbulent fluctuations of velocity:

$$\tau = -\rho \overline{u'w'}; \text{ so } u_* = \sqrt{-\overline{u'w'}}$$

where u' and w' are the fluctuating components of horizontal and vertical velocity. Through this covariance a net downward flux of momentum is delivered from the wind to the ground. From this definition it can be seen that u_* is of the same order of magnitude as the fluctuations of velocity.

- k is von Kármán's constant, which has a value of about 0.4.
- z_0 is a parameter called the roughness length, which depends on the details of the surface, and can be interpreted as the size of eddies at the surface; for example, z_0 is of the order of 10^{-2} m over grass and 1 m over forests or cities (Panofsky & Dutton, 1984, sec. 6.2). The logarithmic profile reaches $u(z) = 0$ at $z = z_0$ if extrapolated downward, but it is valid only above the so-called roughness sublayer, extending to about two to five times the height of the surface irregularities, where the flow is dynamically influenced by the irregularities.

The parameters u_* and z_0 can be determined by measuring $u(z)$ at different heights and fitting a straight line to u vs. $\ln z$.¹ The length z_0 is a characteristic of the surface, so after z_0 is determined at a particular site, u_* can be found in other wind conditions from a measurement of $u(z)$ at a single height.

¹ $\overline{u'w'}$ can be measured directly with a fast-responding, three-dimensional sonic anemometer, but this is much more expensive than just measuring the mean velocity. Alternately, surface stress can be measured directly with a drag plate, but results are often unreliable (Kaimal & Wyngaard, 1990; Kaimal & Finnigan, 1994, section 6.3).

von Kármán's law is derived from the assumption that the velocity profile becomes independent of Reynolds number in the limit of large Re ; Barenblatt (1996, 2003a) argues that this assumption is not valid and the profile does depend on Re with the form:

$$\frac{u(z)}{u_*} = \left(\frac{\sqrt{3}}{2\alpha} + \frac{5}{2} \right) \left(\frac{u_* z}{\nu} \right)^\alpha, \quad (2.3)$$

where ν is kinematic viscosity, and $\alpha = 3/(2 \ln Re)$. This equation was deduced from the assumption of incomplete similarity in the nondimensionalized height $u_* z / \nu$ and the requirement for the velocity profile to have a well-defined limit as the viscosity vanishes; the numbers $\frac{\sqrt{3}}{2}$, $\frac{5}{2}$ and $\frac{3}{2}$ were derived from experimental data on pipe flow at various Re up to 35×10^6 . For flow across an infinite plane, Re is not uniquely defined, and α must be determined by fitting data to the curve. Barenblatt does not consider surface roughness, which is significant for any terrain rougher than very smooth ice (Sutton, 1953, sec. 3.8, 7.2; Panofsky & Dutton, 1984, sec. 6.2); therefore we do not expect (2.3) to hold exactly over natural terrain, but it does suggest that wind speed should depend on height through a power law.

Turbulence generated by heat flux

There is usually a significant temperature gradient in the surface layer. During the day, as the sun heats the ground, air near the ground is warmer and less dense than air above, so it is unstable to vertical displacements. In this case buoyant forces promote turbulence and convert gravitational potential energy to turbulent kinetic energy. At night, the temperature gradient is reversed, and turbulence is suppressed. Neutral stability is rare, and is only approached when the sky is heavily overcast, so the ground is not gaining or losing energy by radiation, and in addition there is moderate or high wind so the air is well mixed in temperature.

The velocity profile in thermally stratified turbulent flows is observed to deviate from the logarithmic law. Such flows are described by the Monin-Obukhov similarity theory (Monin & Yaglom, 1971, chap. 7), in which the governing parameters are

buoyancy parameter g/T_0 , g = gravity

T_0 = absolute temperature at surface

heat flux $q/c_p\rho$, q = upward heat flux at surface

c_p = specific heat capacity of air

as well as z, u_*, ρ as defined previously. By dimensional analysis, the velocity gradient has the form

$$\frac{kz}{u_*} \frac{\partial u}{\partial z} = \phi_m \left(\zeta \equiv \frac{z}{L} \right), \text{ where } L \equiv -\frac{u_*^3}{k(g/T_0)(q/c_p\rho)} \quad (2.4)$$

It can be shown that ζ represents a ratio of buoyant generation of turbulence to mechanical shear generation. Thus, at large heights buoyant forces are relatively more important than at small heights, because near the ground the larger eddies are suppressed.

The dimensionless function $\phi_m(\zeta)$ must be determined empirically, and must have $\phi_m(0) = 1$ so that (2.4) reduces to (2.2) for zero heat flux. Observed wind profiles have been fit to various forms for $\phi_m(\zeta)$, such as the Businger-Dyer formula (Arya, 1999, sec. 4.7.2):

$$\begin{aligned} \phi_m(\zeta) &= (1 + 16|\zeta|)^{-1/4}, & -5 < \zeta < 0 \text{ (unstable)} \\ \phi_m(\zeta) &= 1 + 5\zeta, & 0 \leq \zeta < 1 \text{ (stable)} \end{aligned}$$

The wind profile $u(z)$ is obtained by integrating (2.4) with the boundary condition $u(z_0) = 0$; as before, the profile is only valid above the roughness sublayer.

Since a direct measurement of heat flux requires expensive instruments², formulas have been worked out to estimate u_* and L from the mean wind speed and temperature measured at two heights (Arya, 1999, sec. 4.8.1; Arya, 1988, sec. 11.5.6).

Power-law profile as approximate description

If the Monin-Obukhov profile is impractical (for example if it is too complex, or if temperature or other parameters are not available), meteorologists and engineers have long resorted to a simple form for the wind profile (Panofsky & Dutton (1984, sec. 6.3); Sutton (1953, sec. 7.2)),

$$\frac{u}{u_1} = \left(\frac{z}{z_1} \right)^\alpha, \quad (2.5)$$

where u_1 and z_1 are a reference velocity and reference height, and α is found by fitting the equation to measurements of u at two or more heights. Although the form (2.5) lacked theoretical justification until the work of Barenblatt (2003a), it

²The turbulent heat flux is $\overline{w'T'}$, where T' is the fluctuating component of temperature; it can be measured directly by a sonic anemometer. The heat flux can also be determined from the energy budget if the radiation input and heat flux into the soil are measured.

provides a reasonable fit to wind profiles in the surface layer over a wide range of surface roughness and stability conditions, and is frequently used in air pollution modeling (Arya, 1999, sec. 4.8.3).

For neutrally stratified boundary layers, the value $\alpha = \frac{1}{7}$ is often cited in engineering texts, and was suggested by Prandtl based on experiments on pipe flow at moderate Reynolds number (Schlichting, 1968). Observed values of α in the atmosphere range from nearly 0 in very unstable conditions, representing perfect mixing and a uniform velocity profile, to nearly 1 in very stable conditions, approaching the Couette linear profile of laminar motion over a plane surface. The value of α also depends on surface roughness: roughness promotes mixing near the surface, which reduces the velocity gradient at small z and thus leads to larger α .

2.2 Turbulent diffusion

The gradient transport assumption

To solve (2.1) we need to know \mathbf{F} , the diffusive flux due to turbulent mixing, which requires further assumptions. The simplest model is an analogy to molecular diffusion: it is assumed that the flux is linearly proportional to the density gradient with some proportionality constant K :

$$\mathbf{F} = -K\nabla c(\mathbf{r}, t)$$

K is called a turbulent exchange coefficient, or turbulent diffusivity. In the idealized conditions described above, with all quantities depending only on height, the flux is in the vertical direction:

$$F_z = -K \frac{\partial c}{\partial z} \quad (2.6)$$

Similarly, the shear stress due to turbulence (defined with the opposite sign convention) is

$$\tau = \rho K_m \frac{\partial u}{\partial z} \quad (2.7)$$

These K 's represent mixing by turbulent eddies, and are usually several orders of magnitude larger than the corresponding molecular viscosity or diffusivity.

Unlike their molecular counterparts, turbulent exchange coefficients depend on the particular flow field—rather than molecular properties—and also vary from one region to another of the same flow (Arya, 1999, sec. 4.6.1). Experiments show that they are definitely not uniform in space: if K were spatially uniform and the wind speed were also independent of height, mass injected at a

steady rate from a point source at the ground would produce a Gaussian plume, in which plume height grows with the square root of downstream distance x , and ground-level concentration decreases as $1/x$. However, the plume height is observed to grow as a larger power of distance, 0.75 to 1 instead of 0.5 (Panofsky & Dutton, 1984, sec. 10.3), and the ground-level concentration also decreases faster than $1/x$ (Sutton, 1953, p. 277). Therefore the exchange coefficient cannot be constant, but increases with height; this is because in the atmosphere, there are eddies of a wide range of sizes, and at greater heights, larger eddies contribute to mixing. A constant K would imply that there is only one length scale of mixing, a molecular length scale, which is not true in turbulence.

It is sometimes assumed (e.g., Barenblatt (2003b)) that the ratio of the K 's for momentum and concentration is independent of height:

$$K(z) = (\text{constant})K_m(z). \quad (2.8)$$

This assumption implies that the mechanisms of turbulent transfer for the passive admixture are the same as for momentum. However, observations suggest that this ratio does depend slightly on z/L in unstable conditions, though not in stable conditions. The ratio at neutral stability is generally taken to be 1, although there is disagreement over this value in the literature (Kaimal & Finnigan (1994, sec. 1.3.5); Brown *et al.* (1993, sec. 3c); Panofsky & Dutton (1984, sec. 6.9)).

Implications of constant flux

Fluxes and concentration gradients are expensive to measure directly, and so various assumptions are used to estimate $K(z)$. The fluxes of momentum, heat, and mass are generally considered to be independent of height within the surface layer. If the assumption of constant flux is valid, then $u_* = \sqrt{\tau/\rho}$ is independent of height. Then (2.7) can be written as

$$K_m(z) = \frac{u_*^2}{\partial_z u} \quad (2.9)$$

and using the Monin-Obukhov expression (2.4) for velocity gradient gives (Arya (1999, sec. 4.7.2); Panofsky & Dutton (1984, sec. 6.8)):

$$K_m(z) = \frac{ku_* z}{\phi_m(\zeta)} \quad (2.10)$$

If instead the velocity profile follows the power law (2.5), then (2.9) becomes

$$K_m(z) = \frac{u_*^2}{\partial_z u} = \frac{u_*^2 z_1}{u_1 \alpha} \left(\frac{z}{z_1} \right)^{1-\alpha} \quad (2.11)$$

Equations (2.5) and (2.11) are known in meteorology as “Schmidt’s conjugate power laws.”

The turbulent diffusivity K could be derived from (2.11) combined with (2.8); however, since both these equations are only approximations, K is often modeled instead with a separate power law,

$$K(z) = K_1 \left(\frac{z}{z_1} \right)^m, \quad (2.12)$$

where m is not necessarily equal to $1 - \alpha$. The parameters K_1 and m could be determined by fitting (2.12) to the more accurate expression (2.10), which tends to result in m slightly greater than $1 - \alpha$ (Arya, 1999, sec. 4.8.5). The power m describes how the size of the turbulent eddies increases with height: in very unstable conditions, with convective mixing, m approaches 1 and their size increases linearly with height; in very stable conditions, where turbulence is suppressed, m approaches 0 and their size becomes constant with height.

Limitations

The gradient-transport assumptions (2.7, 2.6) state that the flux at a point depends only on the local gradient. This assumption fails if the eddies are large compared to the scale of curvature of the profile. If there are eddies large enough to carry air between regions of significantly different gradient, the actual flux can be non-local and even opposite the local gradient (Arya, 1999, sec. 4.6.1; Panofsky & Dutton, 1984, sec. 4.7.2; Pasquill & Smith, 1983, sec. 3.1). Such large eddies occur most often in very unstable conditions, such as on a clear sunny day with light winds, where buoyancy-generated convection is the dominant source of turbulence. Under these conditions “looping” plumes are seen, as the large eddies move the plume as a whole back and forth, instead of the spreading or “coning” plumes predicted by gradient-transport theory (Arya, 1999, sec. 6.8). Thus gradient-transport theory is most valid when mechanical shear is dominant, with slightly unstable, neutral or stable temperature profiles and strong winds.

Slender plume approximation

Turbulent diffusion in the x direction may be neglected when advection dominates dispersion in the far downwind limit, i.e., x large compared to K/u . (Typically K is of the order of 1–10 m²/s and u of the order of 1–10 m/s, so x should be large compared to 1 meter.) It is also possible, but more cumbersome, to solve the advection-dispersion equation (2.1) including diffusion in the x direction and then take the limit for $x \gg K/u$, which leads to the same result; see,

for example, Sutton (1953, sec. 4.6), or Huang (1979). Neglecting such diffusion is called the slender plume approximation (Arya, 1999, sec. 6.3.6). With this approximation, the concentration will be zero everywhere upwind of the source.

3 Analytical and numerical solutions of the advection-dispersion equation

Both solutions of equation (2.1) discussed here make two further simplifying assumptions:

- The flow is stationary and the source remains constant in time for long enough to establish a steady-state concentration field. For the numerical simulation, this assumption was not actually necessary, but was used to provide a simple test case.
- The source is independent of the crosswind direction, y , so the concentration depends only on x and z ; that is, the problem is two-dimensional. This assumption is equivalent to considering only the cross-wind integrated concentration,

$$\bar{c}_y \equiv \int_{-\infty}^{\infty} c(\mathbf{x}, t) dy.$$

Meteorologists sometimes use this simplification and then assume a Gaussian distribution in the lateral direction. The lateral diffusivity depends on distance from the source and atmospheric stability, and is often estimated using the empirically derived Pasquill-Gifford diagrams (Arya (1999, sec. 6.6.4); Pasquill & Smith (1983, sec. 3.2)).

With these assumptions, the advection-dispersion equation (2.1) has been reduced to

$$u(z)\partial_x c(x, z) = \partial_z (K(z)\partial_z c(x, z)). \quad (3.1)$$

3.1 Analytical solution and interpretation

Steady Propagation from Line Source

(3.1) has an analytical solution when the velocity and diffusivity are given by power laws as discussed above, and the additive is injected at a constant rate from an infinite straight line on the ground perpendicular to the wind. In other

words, end effects are neglected; hence the solution will overestimate the concentration from any finite source. The problem is now

$$\begin{aligned} u(z)\partial_x c(x, z) &= \partial_z (K(z)\partial_z c(x, z)), \text{ for } x > 0 \text{ and } z > 0, \text{ with} \\ u(z) &= u_1 \left(\frac{z}{z_1} \right)^\alpha, \\ K(z) &= K_1 \left(\frac{z}{z_1} \right)^m. \end{aligned} \quad (3.2)$$

Solutions are known for boundary conditions specifying concentration at the ground, flux at the ground, or a linear combination of the two (Philip, 1959). The flux-type boundary condition will be discussed here. Two boundary conditions are implied by the physical model. First, no flux crosses the ground for $x > 0$:

$$K_c(z)\partial_z c \rightarrow 0 \text{ as } z \rightarrow 0 \quad (3.3)$$

(If the admixture is absorbed or interacts with the ground, this is not valid.) Second, there is a known constant source. Integrating (3.2) from $z = 0$ to ∞ gives

$$\begin{aligned} \partial_x \int_0^\infty u(z)c(x, z)dz &= K_c(z)\partial_z c|_0^\infty = 0, \text{ so} \\ \int_0^\infty u(z)c(x, z)dz &= Q, \text{ a constant independent of } x. \end{aligned} \quad (3.4)$$

Q is the rate of injection by the source at the origin. Since there is no absorption, in the steady state the total flux of admixture across any vertical line at $x > 0$ is equal to the rate of injection.

Solution and interpretation

Equation (3.2) with its boundary conditions (3.3) and (3.4) can be solved by the method of similarity, which applies when a function of two variables has a symmetry so that it depends only on a single, dimensionless combination of the two variables.

The solution for the concentration can be presented as the product of a ground-level concentration $c_{gl}(x)$ and a plume height function $c_{ph}(x, z)$:

$$c(x, z) = c_{gl}(x)c_{ph}(x, z) \quad (3.5)$$

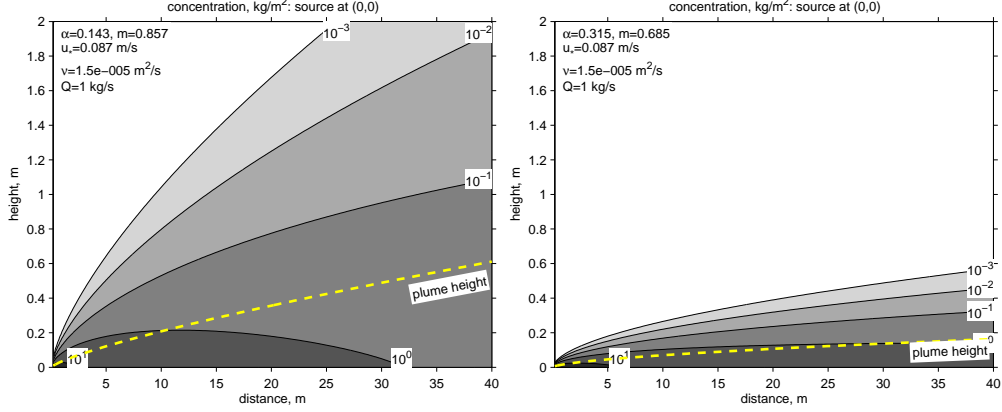


Figure 3.1: Contours of plume (3.5) for two values of α , representing different amounts of mixing: larger α means less mixing. The dashed line shows the height where $c(x, z)$ is $1/e$ of its value at the ground: $z_h = z_1(x/x_1)^{1/r}$.

315 where

$$c_{gl}(x) = \frac{Q}{u_1 z_1} \frac{r}{\Gamma(\beta)} \left(\frac{x}{x_1} \right)^{-\beta},$$

$$c_{ph}(x, z) = \exp \left\{ -\frac{(z/z_1)^r}{x/x_1} \right\},$$

$$r = 2 - m + \alpha, \quad \beta = \frac{1 + \alpha}{r}, \quad x_1 = \frac{u_1 z_1^2}{r^2 K_1}$$

$\Gamma(\beta)$ is the Gamma function (Abramowitz & Stegun, 1964)

316 Equation (3.5) is well known in the literature (Deacon, 1949; Calder, 1949; Sut-
 317 ton, 1953; Monin & Yaglom, 1971; Huang, 1979; Pasquill & Smith, 1983; Panof-
 318 sky & Dutton, 1984; Arya, 1999). Barenblatt (2003b) explains how the solution
 319 is obtained.

320 Figure 3.1 shows contours of $c(x, z)$. The first plot has $\alpha = \frac{1}{7}$, Prandtl's
 321 approximation for neutral stability. The second has $\alpha = 0.3149$ chosen to fit the
 322 velocity profile in the simulation, as seen below in Figure 4.1. In both cases the
 323 conjugate power law, $m = 1 - \alpha$, was used for the diffusivity. In the second plot,
 324 the larger α and smaller m produce less mixing and less upward transport.

325 According to (3.5), the plume height grows as $x^{1/r}$, and the ground-level
 326 concentration decreases as $x^{-\beta}$. The concentration is inversely proportional to
 327 the wind speed u_1 , as usual for advection. Some important limiting cases are:

- 328 • For uniform wind ($\alpha = 0$) and uniform diffusivity ($m = 0$), (3.5) reduces

329 to a Gaussian vertical profile:

$$c(x, z) = \frac{Q/u_1}{\sqrt{\pi K_1 x/u_1}} \exp\left(-\frac{z^2}{4K_1 x/u_1}\right)$$

330 However, this equation is not a good fit to observed profiles in field and
331 wind tunnel experiments (Brown *et al.* , 1993).

- 332 • If the conjugate power laws (2.5, 2.11) hold, then $m = 1 - \alpha$, $r = 1 + 2\alpha$.
333 If $\alpha = \frac{1}{7}$ for neutral stability, this gives $\beta = \frac{8}{9}$; Sutton (1953, p. 281)
334 cites observations of the propagation of smoke from a line source over level
335 downland in neutral conditions, where the ground-level concentration was
336 observed to decrease as $x^{-0.9}$, corresponding to $\beta = 0.9$.

337 This solution is the response of the system to mass injected at the line
338 $(x, z) = (0, 0)$. If instead the source is spread over the ground with a density of
339 $S(x)$, the solution is the convolution

$$c(x, z) = \int_{-\infty}^x S(x') c_{\text{line}}(x - x', z) dx' \quad (3.6)$$

340 where $c_{\text{line}}(x, z)$ is the solution for a unit line source:

$$\begin{aligned} c_{\text{line}}(x, z) &= \frac{1}{u_1 z_1} \frac{r}{\Gamma(\beta)} \left(\frac{x}{x_1}\right)^{-\beta} \exp\left\{-\frac{(z/z_1)^r}{x/x_1}\right\}, \quad x > 0; \\ &= 0, \quad x \leq 0. \end{aligned}$$

341 3.2 Coupled simulation of air and subsurface transport

342 Oldenburg & Unger (2004) used the integral finite difference code TOUGH2
343 (Pruess *et al.* , 1999; Pruess, 2004) to simulate the transport of CO₂ leaking
344 from a geologic sequestration site. The CO₂ mixes with soil gas and also dis-
345 solves in groundwater, eventually seeping out of the ground. The authors eval-
346 uated whether it would reach hazardous concentrations above ground. Neutral
347 stability was assumed, so the logarithmic wind profile (2.2) was used:

$$u = \frac{u_*}{k} \ln \frac{z}{z_0} \quad (3.7)$$

348 with u_* chosen to give a desired value of u at a reference height of $z = 10$
349 m, $u = 1$ m/s or $u = 5$ m/s representing typical slow and fast wind speeds;
350 $k = 0.4$; and $z_0 = 0.10$ m. TOUGH2 cannot specify the wind velocity profile
351 directly; instead, a horizontal pressure gradient was imposed, and an artificial

height-dependent “permeability” was specified in the cells above ground such that Darcy’s law would yield the desired horizontal flow speed. The resulting horizontal wind speed was not quite independent of x , and the vertical wind speed of gas above ground was not exactly zero, perhaps due to discretization and round-off errors.

The vertical diffusivity above ground was derived from the constant flux assumption (2.10), at neutral stability where $\phi_m = 1$, together with the assumption that the turbulent exchange coefficients for momentum and mass are equal (2.8), giving

$$K(z) = ku_*z. \quad (3.8)$$

The integral finite difference method produces numerical dispersion in the horizontal direction on the order of one-half the grid spacing multiplied by the horizontal wind velocity. This dispersion could make the plume spread upwind unrealistically; as a countermeasure, the vertical diffusivity K was set to zero upwind of the source.

Figure 3.2 shows the computed mass fraction of CO_2 in air at a quasi-steady state (6 months after injection begins in the simulation). Figure 3.3 shows the same data zoomed in on an area above the ground and directly above the area where CO_2 was injected. These figures show selected contour lines interpolated from the grid. For clarity of comparison, the background fraction of CO_2 in the atmosphere was set to zero, instead of its real value of about 380 ppmv, or about 5.7×10^{-4} mass fraction. Also, all other sources of CO_2 besides the reservoir leak were omitted; in reality there can be a significant concentration (thousands of ppmv) in the top 1 m of soil due to respiration by soil bacteria.

A very small fraction of CO_2 has diffused from the air back into the ground downwind of the plume, and is slowly diffusing deeper; it also dissolves in groundwater which is moving downward.

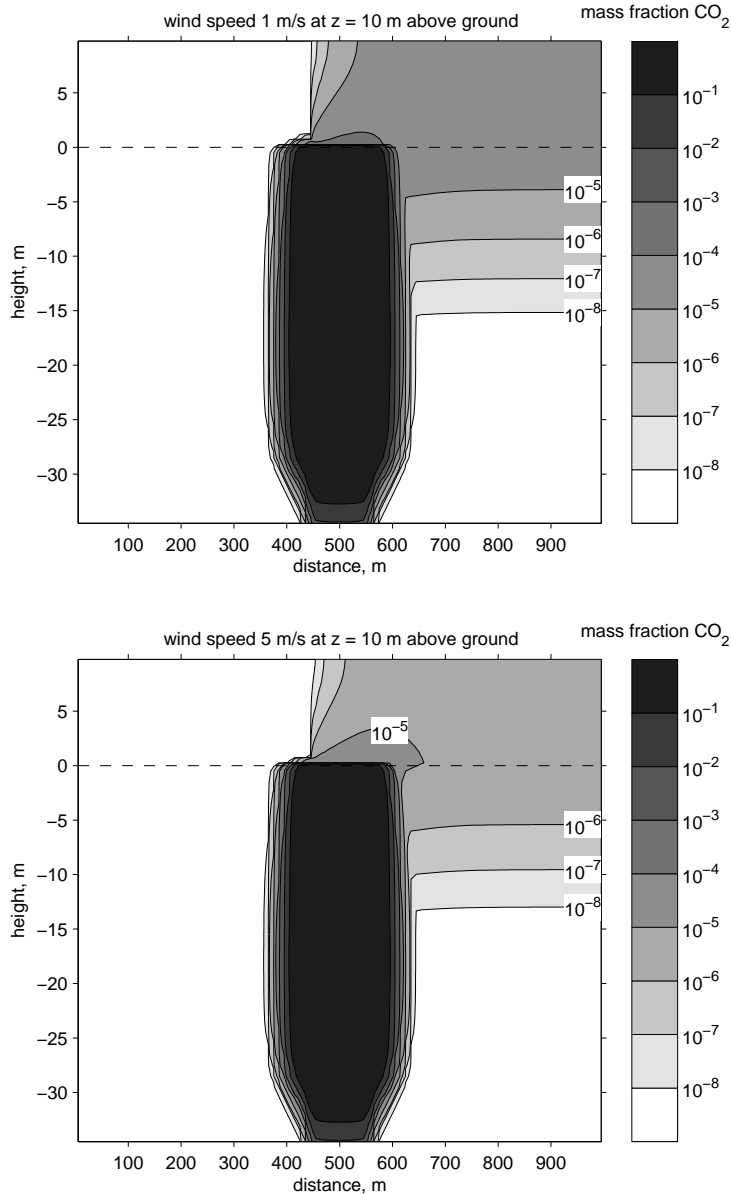


Figure 3.2: Mass fraction CO₂ in gas for slow and fast wind speeds. Similar to Figure 9ab in Oldenburg & Unger (2004); redrawn from data kindly provided by the authors. CO₂ is driven upward by high pressure at the source, displacing soil gas in the subsurface plume. In the second figure it can be seen that the concentration in the subsurface, where the time scale of propagation is slower, has not yet reached equilibrium with the air downwind of the source: see the 10⁻⁵ contour.

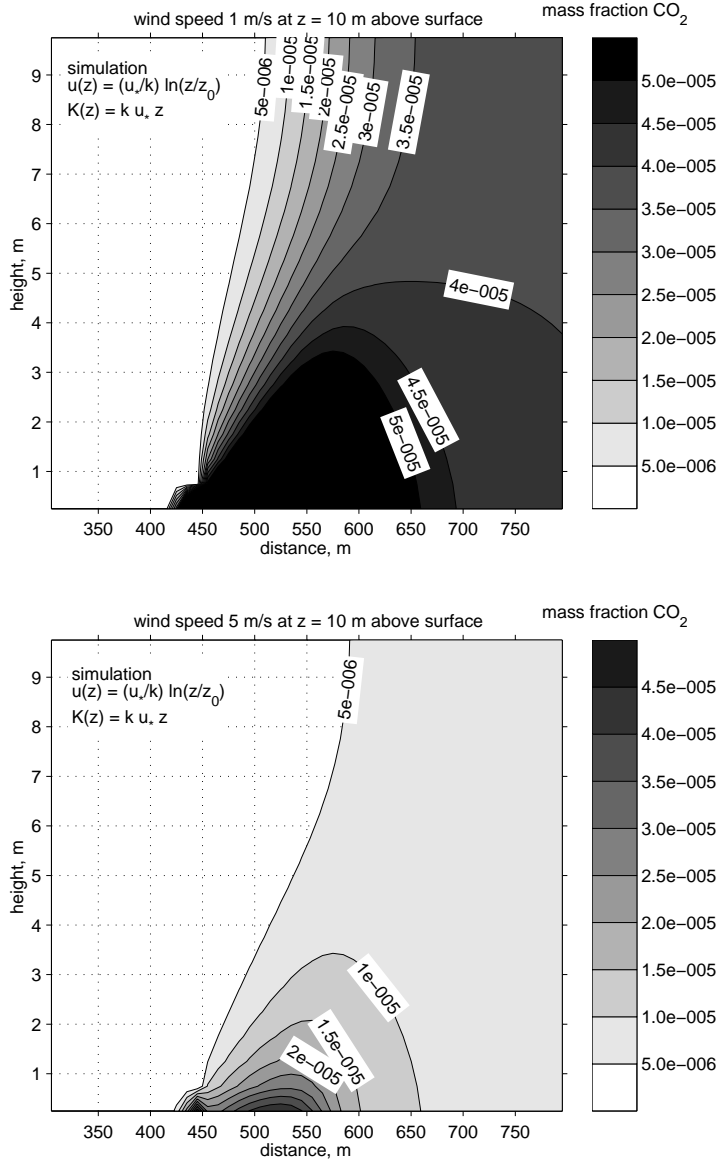


Figure 3.3: Mass fraction CO₂ in gas for slow and fast wind speeds. Same data as previous figure, showing a smaller region with different contour levels. As usual for advection, the concentration is inversely proportional to wind speed (5 times smaller for the 5 times faster wind speed). Note that contour lines are perpendicular to the top surface, which is an artifact of using a closed top boundary condition. Also, the spike at $x = 450$ m is caused by the artificial suppression of vertical dispersion upwind of the source.

4 Comparison and conclusions

4.1 Comparison of two solutions

To compare this simulation with the analytic solution, the logarithmic profile was approximated by a power law. Figure 4.1 shows the velocity at the grid points of the simulation, with fits to $u = u_1 z^\alpha$ by Matlab's curve fitting tool; one fit is unweighted and the other is weighted by the difference between successive values of u . There is no unique criterion to choose the most appropriate fit. The unweighted fit was used for the velocity profile. The diffusivity was given by (3.8), rather than the conjugate power law (2.11), in order to match the diffusivity in the simulation.

In the simulation, CO_2 passes from the ground to the air over an extended area. Therefore, it should be compared with the analytical solution using the convolution (3.6). Since the flux of CO_2 across the ground surface was

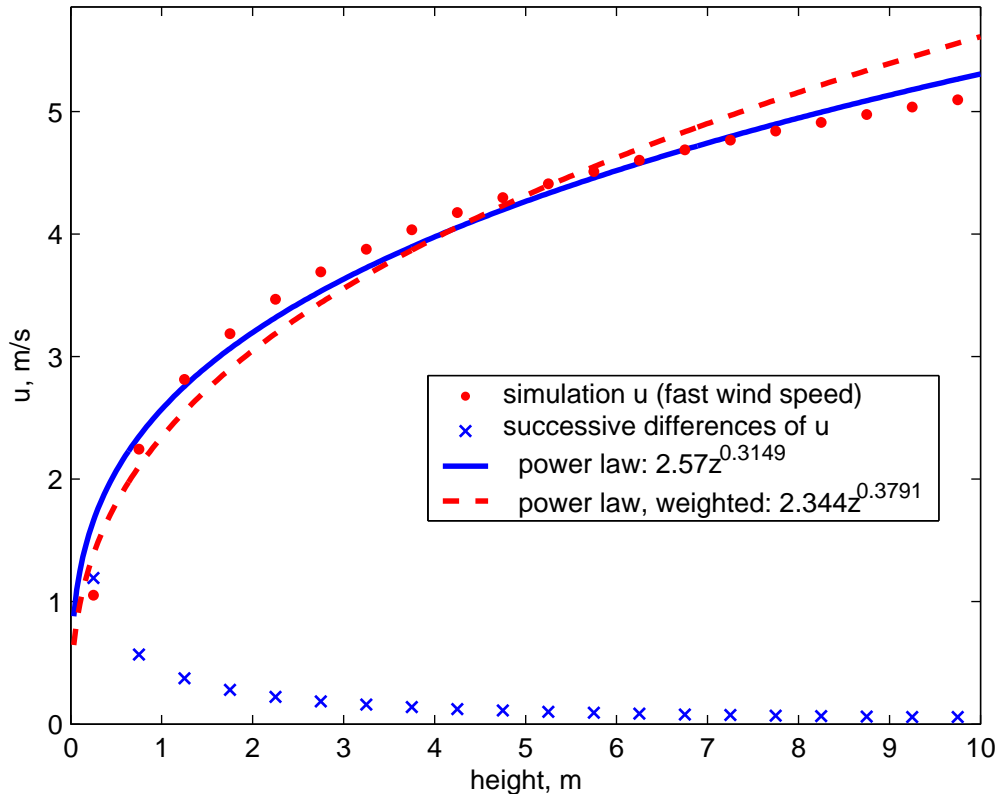


Figure 4.1: Horizontal wind speed in the simulation, and power-law fits.

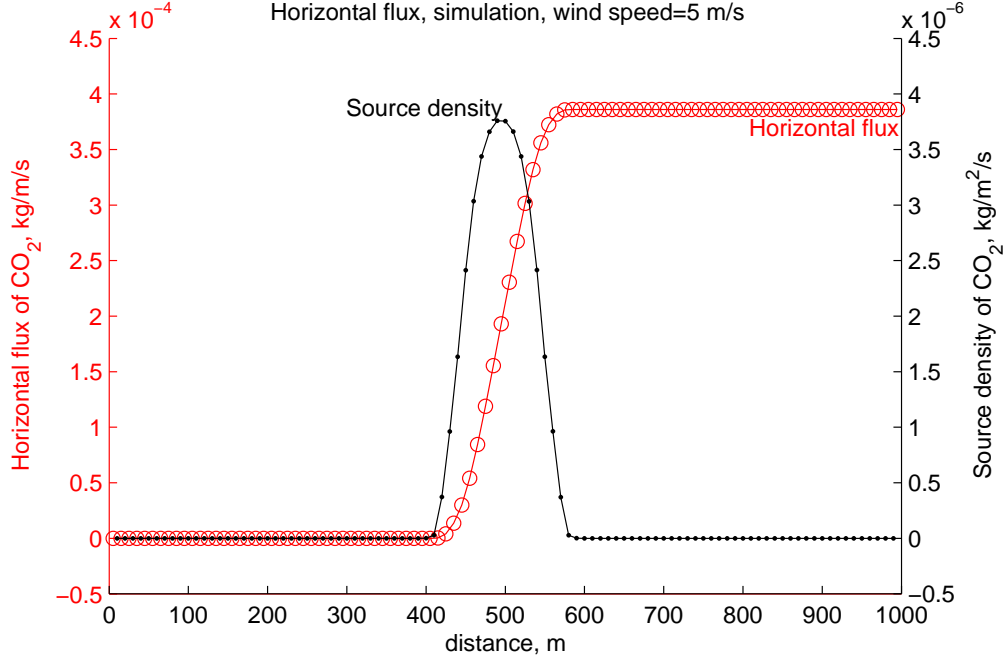


Figure 4.2: Source density of CO₂ from ground to air calculated from simulation result. The circles indicate total horizontal flux at gridpoints x_i calculated by $f_i = \sum_{z_j > 0} X^{\text{CO}_2}(x_i, z_j) F_{gx}(x_i, z_j) \Delta z$. The source density is then calculated from the successive differences, $S_{i+0.5} = (f(x_{i+1}) - f(x_i)) / \Delta x$. A linear interpolation of this source density is used in the convolution (3.6). The horizontal flux declines very slightly downwind of its maximum, due to reverse seepage of CO₂ back into the ground; the loss is about 10^{-5} of the maximum flux, too small to see on the graph.

not directly available, the source density was inferred by

$$S(x) = \frac{d}{dx} \int_0^\infty X^{\text{CO}_2}(x, z) F_{gx}(x, z) dz,$$

X^{CO_2} = mass fraction CO₂ in gas, F_{gx} = horizontal flux of gas

which is shown in Figure 4.2. The reverse seepage flux of CO₂ back into the ground can also be calculated, since the horizontal flux declines very slightly downwind of its maximum at about $x = 600$ m; the loss is about 10^{-5} of the maximum flux. The source density for the other data set (wind speed 1 m/s) was indistinguishable, because the seepage of CO₂ was driven by a high pressure at 30 m below the surface, and did not depend on the wind speed above the ground.

Figure 4.3 shows the result of the convolution and compares it with the simulation. It is qualitatively similar to the TOUGH2 plume, but does not show the artifacts of the closed top boundary condition and the suppression of upwind diffusion. Figure 4.4 shows how the concentrations depend on downwind distance at $z = 0.75$, near the ground, and at $z = 9.75$, the top of the simulation. The results are close near the source but differ at the top and side, because different boundary conditions were imposed there.

The aboveground domain has much shorter inherent time scales than the underground domain. In the simulation, the permeability changes abruptly from 1 darcy just below the ground to 2×10^9 darcy just above, and from horizontal gas speeds of the order of 10^{-7} m/s below to 1 m/s above. It is difficult for the code to maintain accurate calculations at such a boundary. Figure 4.5 illustrates how the smooth distribution of vertical gas velocities under the surface suddenly becomes irregular and noisy in the air.

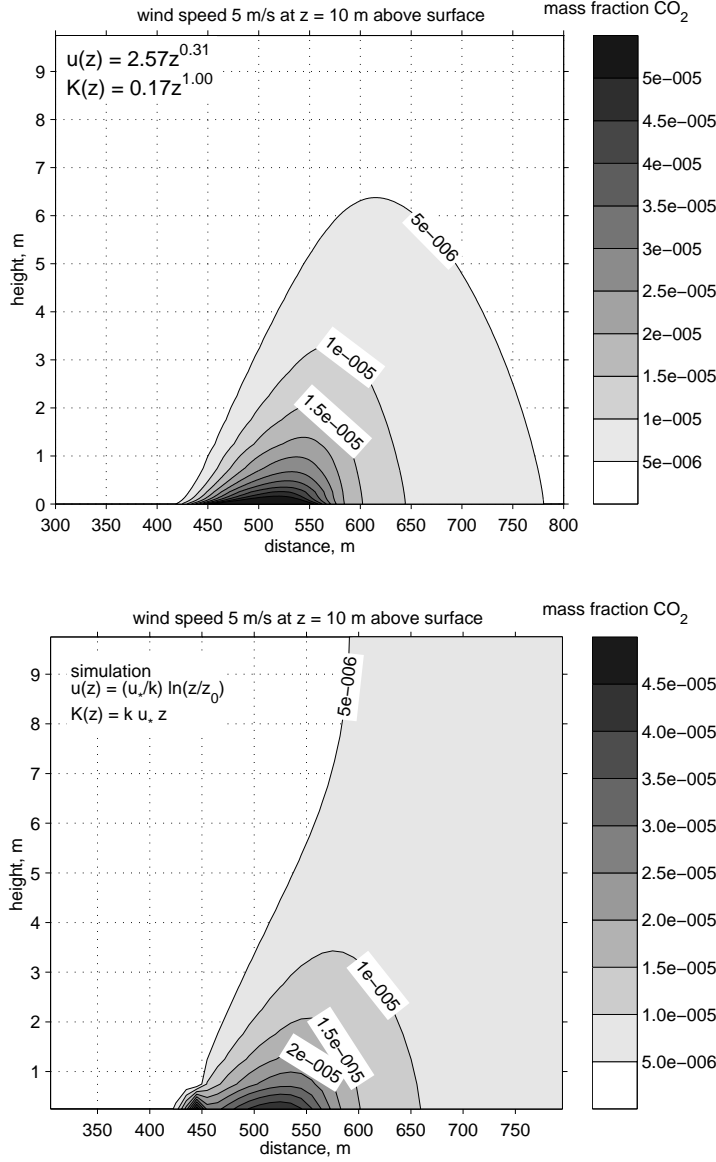


Figure 4.3: Convolution of line-source kernel for fast wind speeds with source distribution from Figure 4.2 (top). Compare to coupled simulation (bottom). Contours near the source and far from the side and top boundaries are similar in the two solutions. The analytical solution does not have the closed top boundary condition and the artificial barrier to upwind diffusion. The results for the slower wind speed are not shown because they are the same except for a factor of 5, because of the factor of $1/u_1$ in equation (3.5).

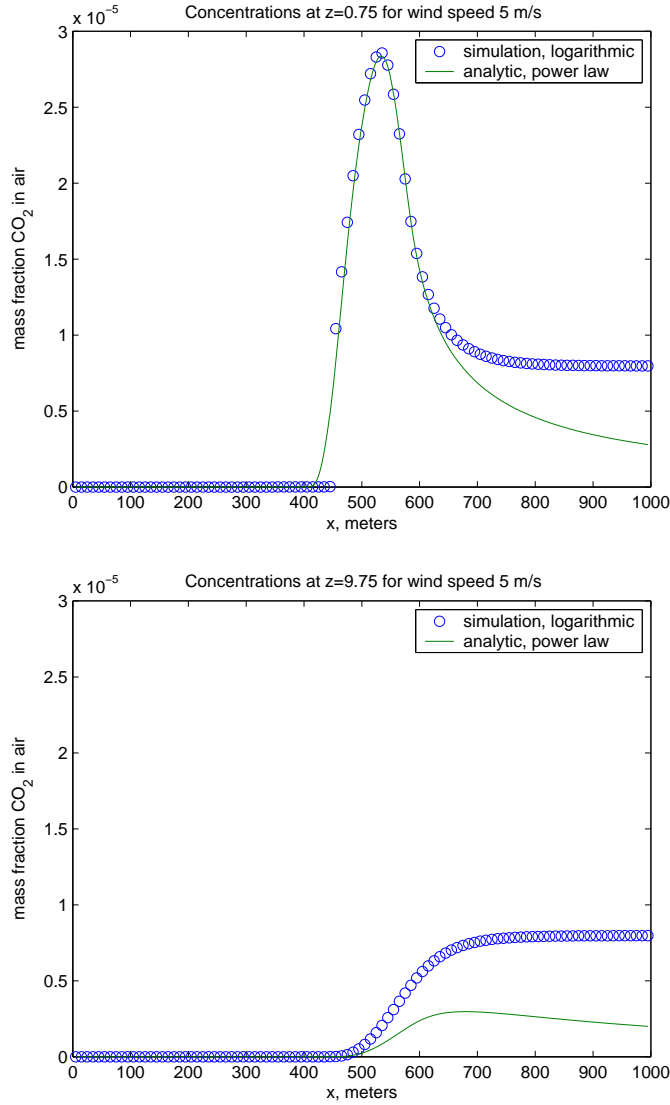


Figure 4.4: The two solution methods compared at heights of $z = 0.75$ m and $z = 9.75$ m. The concentration in the simulation decays more slowly with downwind distance, probably because a zero-gradient side boundary condition was used (i.e., $\partial c / \partial x = 0$ at $x = 1000$), which causes the concentration to reach a constant value at relatively small downwind distances, instead of decaying to zero only asymptotically as $x \rightarrow \infty$. Near the top, the concentration in the simulation is more than twice as large, likely because of the closed top boundary condition. Both these boundary conditions would lead to accumulating CO₂ in the simulation, rather than letting it escape to infinity in the vertical and horizontal.

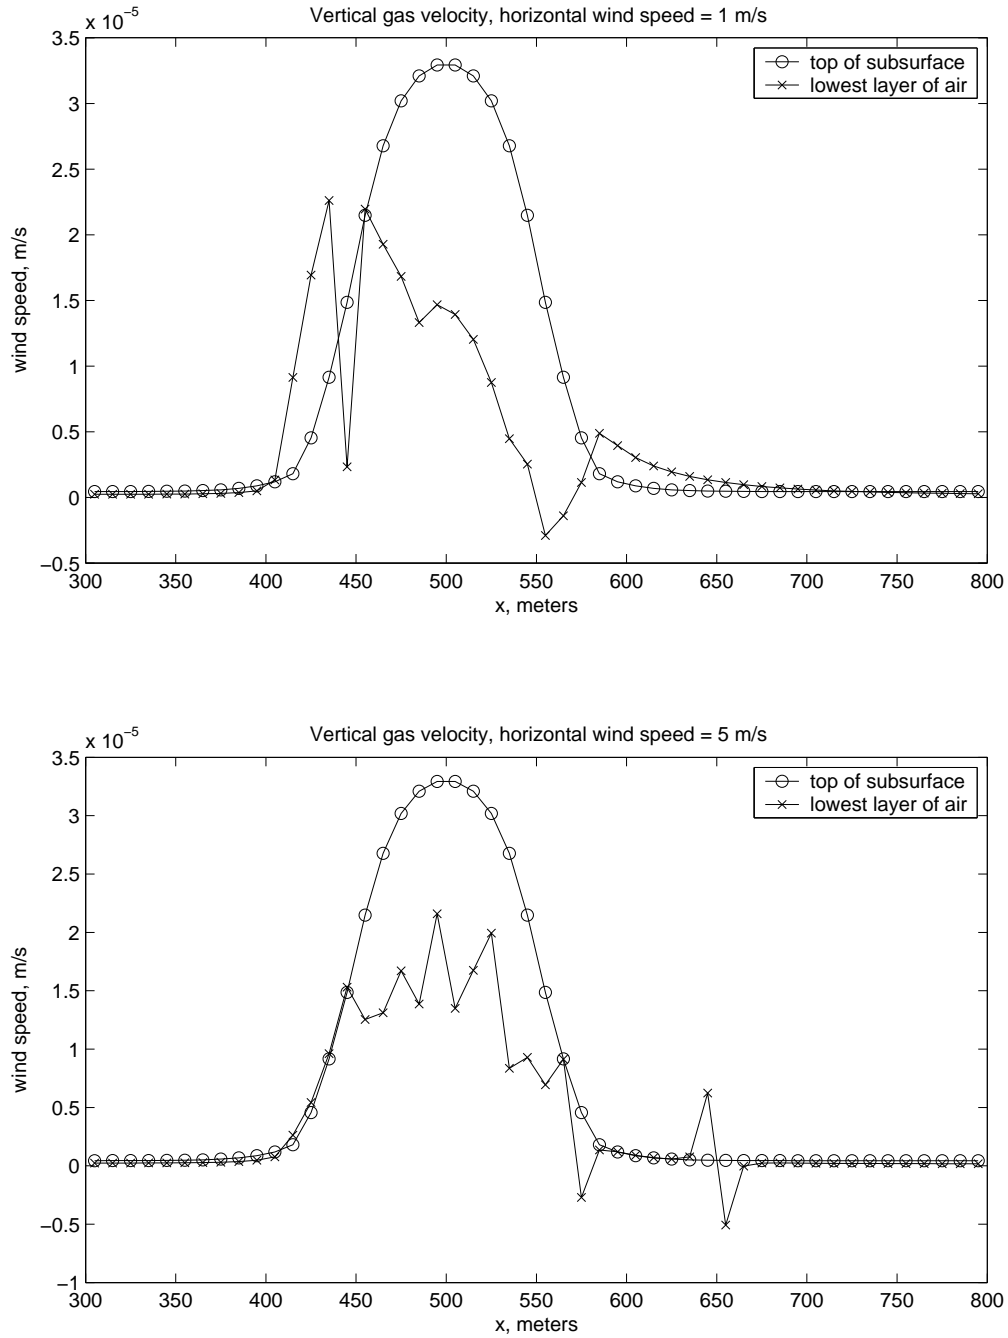


Figure 4.5: Vertical gas velocity in the simulation at the top layer of the subsurface and the bottom layer of air.

4.2 Conclusions

Both approaches described here are limited by the highly idealized model of turbulent diffusion: the gradient-transport model assumes that turbulent transport of momentum and mass is local, just like diffusion with a different constant of diffusivity, as described in section 2. The velocity profiles described in section 2 apply only to heights above any surface obstacles and large compared to z_0 ; they assume flat ground with short, homogeneous vegetation. Modeling the roughness sublayer, where there can be significant turbulent transport in cities and forests, would be far more complex.

The concentrations computed from the analytic solution, using a power-law profile fit to the logarithmic velocity profile over a limited range of heights, are close to the numerical simulation result in the part of the domain far from the boundaries. Near the side and top boundaries, the two solutions are significantly different. The simulation has no vertical flux at the top ($z = 10$ m) and $\partial c / \partial x = 0$ at the side ($x = 1000$ m). The analytic solution obeys these same conditions at $z \rightarrow \infty$ and $x \rightarrow \infty$ respectively, instead of finite values. This result suggests that the simulation would be more realistic with a larger domain size, but then the computational cost would be greater.

The TOUGH2 coupled simulation can model barometric pumping and reverse seepage of air contaminants back into the ground when these phenomena could be significant, such as with large soil permeability. But the underground and aboveground domains operate on vastly different time and space scales, which suggests separating the domains whenever they are not strongly coupled. We expect on *physical* grounds that the air above ground is not usually coupled to the subsurface, because the capillary entry pressure for gas into the ground is high enough that the ground can be treated as a reflecting boundary. In fact, this was a good approximation in the case used for the simulation, as shown by getting the same emission rate out of the ground for both wind speeds. If the main goal is to predict concentrations in the air, the small reverse seepage (only 10^{-5} as great as the total flux of CO_2 into the air) could be neglected.

Each approach has advantages and disadvantages. Some advantages of the analytical solution, as opposed to the coupled simulation, are:

- It is computationally simple and needs no programming, while still allowing variation of K with height.
- It does not suffer from the closed-top boundary condition imposed by TOUGH2 (although TOUGH2 could work around this limitation by adding a very large grid block above the layer of interest to receive the upward flux). The solution is independent of where the boundaries of the domain

451 are placed.

- 452 • It does not have the artificial horizontal dispersion which accompanies
453 advection in the numerical solution.
- 454 • There is no minimum grid cell size. TOUGH2 cannot make the grid cell
455 smaller than the roughness length, z_0 , while using the logarithmic velocity
456 profile.
- 457 • There are no problems of finite precision.

458 Disadvantages of the analytical solution:

- 459 • The solution is known only for power-law profiles. It is questionable how
460 accurately a logarithmic or Monin-Obukhov profile can be approximated
461 by a power law. In particular, the diffusivity will always grow more slowly
462 at large heights for power laws than for the logarithmic profile.
- 463 • It cannot describe a time-dependent source profile, which could easily be
464 handled in TOUGH2.
- 465 • It assumes homogeneous flat terrain, which is invalid for most natural
466 areas.
- 467 • The slender plume approximation fails for wind speeds approaching zero,
468 which is also the worst condition for building up high local concentrations
469 of contaminants.

470 The analytic solution can be used as a simple prediction of pollutant
471 plumes when the wind and diffusivity profiles are known and the problem in-
472 volves only steady-state conditions. It cannot be generalized to non-uniform or
473 non-flat terrain, or three-dimensional or time-dependent problems; such condi-
474 tions would require numerical simulation of the air, which can be performed at
475 various levels of complexity by off-the-shelf products (New Zealand Ministry for
476 the Environment, 2004).

477 Acknowledgments

478 We are grateful to Dr. C. M. Oldenburg of Lawrence Berkeley National Lab-
479 oratory, Earth Sciences Division, for sharing his data, helping us interpret it,
480 and carefully reviewing this report. Dr. N. L. Miller of LBNL also reviewed the
481 report. The authors would also like to thank Professor G. I. Barenblatt, who
482 read an early version of the report and provided very useful discussions.

483 This work has been performed at University of California, Berkeley, and
 484 Lawrence Berkeley National Laboratory of the U.S. Department of Energy under
 485 Contract No. DE-AC02-05CH11231. Support for the first author was provided
 486 by a Sunset Fellowship from the Center for Pure and Applied Mathematics at
 487 UC Berkeley.

488 References

- 489 Abramowitz, Milton, & Stegun, Irene A. 1964. *Handbook of Mathematical Func-*
 490 *tions with Formulas, Graphs, and Mathematical Tables*. 9th Dover printing,
 491 10th GPO printing edn. New York: Dover.
- 492 Arya, S. Pal. 1988. *Introduction to Micrometeorology*. Academic Press.
- 493 Arya, S. Pal. 1999. *Air Pollution Meteorology and Dispersion*. Oxford University
 494 Press.
- 495 Barenblatt, G. I. 1996. *Scaling, Self-similarity, and Intermediate Asymptotics*.
 496 Cambridge University Press.
- 497 Barenblatt, G. I. 2003a. *Scaling*. Cambridge University Press.
- 498 Barenblatt, G. I. 2003b. Transfer of a Passive Additive in a Turbulent Boundary
 499 Layer at Very Large Reynolds Numbers. *Proceedings of the National Academy*
 500 *of Sciences, USA*, **100**, 1481–1483.
- 501 Brown, Michael J., Arya, S. Pal, & Snyder, William H. 1993. Vertical Disper-
 502 sion from Surface and Elevated Releases: An Investigation of a Non-Gaussian
 503 Plume Model. *Journal of Applied Meteorology*, **32**, 490–505.
- 504 Calder, K. L. 1949. Eddy Diffusion and Evaporation in Flow over Aerody-
 505 namically Smooth and Rough Surfaces: A Treatment Based on Laboratory
 506 Laws of Turbulent Flow with Special Reference to Conditions in the Lower
 507 Atmosphere. *Quarterly Journal of Mechanics and Applied Mathematics*, **2**,
 508 153–176.
- 509 Deacon, E. L. 1949. Vertical Diffusion in the Lowest Layers of the Atmosphere.
 510 *Quarterly Journal of the Royal Meteorological Society*, **75**, 89–103.
- 511 Huang, C. H. 1979. A Theory of Dispersion in Turbulent Shear Flow. *Atmo-*
 512 *spheric Environment*, **13**, 453–463.

- 513 Kaimal, J. C., & Finnigan, J. J. 1994. *Atmospheric Boundary Layer Flows:*
514 *Their Structure and Measurement*. Oxford University Press.
- 515 Kaimal, J. C., & Wyngaard, J. C. 1990. The Kansas and Minnesota experiments.
516 *Boundary-Layer Meteorology*, **50**, 31–47.
- 517 Monin, A. S., & Yaglom, A. M. 1971. *Statistical Fluid Mechanics: Mechanics*
518 *of Turbulence*. MIT Press. English edition updated, augmented and revised
519 by the authors.
- 520 New Zealand Ministry for the Environment. 2004 (June). *Good Practice Guide*
521 *for Atmospheric Dispersion Modeling*. Tech. rept. ME522. New Zealand
522 Ministry for the Environment. Available from [http://www.mfe.govt.nz/](http://www.mfe.govt.nz/publications/air/)
523 [publications/air/](http://www.mfe.govt.nz/publications/air/).
- 524 Oldenburg, C. M., & Unger, A. J. 2004. Coupled Vadose Zone and Atmospheric
525 Surface-Layer Transport of Carbon Dioxide from Geologic Carbon Sequestra-
526 tion Sites. *Vadose Zone Journal*, **3**, 848–857.
- 527 Panofsky, H. A., & Dutton, J. A. 1984. *Atmospheric Turbulence: Models and*
528 *Methods for Engineering Applications*. Wiley.
- 529 Pasquill, F., & Smith, F. B. 1983. *Atmospheric Diffusion*. 3rd edn. Ellis Hor-
530 wood.
- 531 Philip, J. R. 1959. The Theory of Local Advection. I. *Journal of Meteorology*,
532 **16**, 535–547.
- 533 Pruess, K. 2004. The TOUGH codes - A family of simulation tools for multiphase
534 flow and transport processes in permeable media. *Vadose Zone Journal*, **3**,
535 738–746.
- 536 Pruess, K., Oldenburg, C., & Moridis, G. 1999. *TOUGH2 User's Guide*. Version
537 2.0 Rep. LBNL-43134 edn. Lawrence Berkeley National Laboratory, Berkeley,
538 CA.
- 539 Schlichting, Hermann. 1968. *Boundary-Layer Theory*. 6th edn. McGraw-Hill.
- 540 Sutton, O. G. 1953. *Micrometeorology*. McGraw-Hill.